





About Us

Sandhu door closers, are one of the prominent Manufacture traders, suppliers and distributors of a wide assortment of Door Closers Products and Accessories. The range of our product is widely appreciated for dimensional accuracy, durable finish, smooth edges, sturdy design and resistance to abrasion as well as corrosion.

Adherence to timely delivery schedules and a wide market network assist us in the delivering the consignments to the desired destinations well on time. We have a reliable logistics team working round the clock to look after the delivery process and further maintaining the safety conditions of the entire product range.

We have huge warehousing facility fully equipped with the latest technology to procure and store our products. Also, we are committed to improve upon the existing standards of our products. Furthermore these attributes of ours and our ethical business policy, quality product, timely delivery and competitive price have helped us in forming a huge clientèle.













Contents

FLOOR SPRING	1-3
DOOR CLOSERS	4
PATCH FITTINGS	5-6
SHOWER HINGES	7-8
GLASS CONNECTORS	7-8
PLASTIC PROFILE	9
KNIGHT HEAD ACC.	10
DOOR KNOBS, REINFORCING BAR	10
OFFICE SLIDING SYSTEM	11-12
LOCKS WITHOUT CUTOUT	13
AUTOMATING SLIDING SENSOR DOOR	14
DOOR HANDLES	15-16






Floor Spring





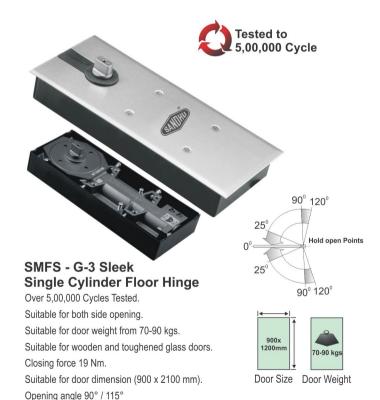





Floor Spring











upto 125 kgs

Door Size Door Weight



SMFS - 02 Heavy Duty

Double Action Cast Iron Body Adjustable Speed Locking at 90°

Suitable for Either Metal Framed or Wooden Door Doors Weighing upto 125 kg or 1200mm in Width







Door Size Door Weight



Cast Iron Body Adjustable Speed Locking at 90°

Suitable for Either Metal Framed or Wooden Door Doors Weighing upto 80 kg or 1000mm in Width









Door Size Door Weight



SMFS - 32 Extra Heavy Duty

Double Action Cast Iron Body Adjustable Speed Locking at 90° Suitable for Either Metal Framed or Wooden Door Doors Weighing upto 125 kg or 1200mm in Width



SMFS - ACC **Top Pivot**







Door Closers









Door Size Door Weight

SMDC - 2111 Aluminium Die Casted Body / **Cast Iron Body**

Rack and Pinion Allov Steel Duly Heat Treated Adjustable Speed

Available in Silver, Golden & Brown Clolours Suitable for Either Metal Framed or Wooden Doors Suitable for Doors Weighing upto 45-60 Kg. or 1000mm in Width

Right Hand & Left Hand Opening Doors







Door Size Door Weight

SMDC - 2115 Aluminium Extruded Section Body

Rack and Pinion Allov Steel Duly Heat Treated **Double Speed Adjustment**

Available in Silver, Golden & Brown Clolours Suitable for Either Metal Framed or Wooden Doors Suitable for Doors Weighing upto 45-80 Kg. or 1000mm in Width

Right Hand & Left Hand Opening Doors





Door Size Door Weight





Door Weight

SMDC - 2100 **Pelmet Arm Door Closer**

Track Arm with Hold Open Function, Power Adjustable with Spring. Single Body size, Powerful Enough to Meet for Medium to Heavy Duty Door Weight and Sizes.

Double Speed Adjustment

Suitable for Doors Weighing upto 60-80 Kg.



SMDC - 2116 Capsule Door Closer

Best for Use on Light Weight Doors upto 40 Kgs. Iron / Aluminium / Zinc Body Rust Resistant Finish





Patch Fittings





SMPF-10 Top Patch



SMPF-10 Bottom Patch



SMPF-40 Big L



SMPF-620 Square Patch



SMPF-610 Small L



Over Panel Patch



SMPF-650 Connector For Double Glass



SM-GDP Top Pivot







Shower Hinges & **Glass Connectors**



Shower Hinges Zinc / SS 304



SMSH-1

Wall to Glass 90° Hinge Material: Zinc / SS 304 Door Thickness: 8mm-12mm Weight Cap.: 45 Kg.

Finish: Matt & Chrome Plated



SMSH-2

Glass to Glass 180° Hinge Material: Zinc / SS 304 Door Thickness: 8mm-12mm Weight Cap.: 45 Kg.

Finish: Matt & Chrome Plated



SMSH-3

Glass to Glass 135° Hinge Material: Zinc / SS 304 Door Thickness: 8mm-12mm Weight Cap.: 45 Kg.

Finish · Matt & Chrome Plated



SMSH-4

Glass to Glass 90° Hinge Material: Zinc / SS 304 Door Thickness: 8mm-12mm Weight Cap.: 45 Kg.

Finish: Matt & Chrome Plated



SMSH-5

Wall to Glass 90° Fix Bracket Material: Zinc / SS 304 Door Thickness: 8mm-12mm

Weight Cap.: 45 Kg.

Finish: Matt & Chrome Plated

Glass Connectors SS 202 / SS 304



SMGC-1 **U** Connector Material: SS 202 / SS 304

Door Thickness: 8mm-12mm Finish: Matt & Chrome Plated



SMGC-2

Glass to Glass 135° Material: SS 202 / SS 304 Door Thickness: 8mm-12mm Finish: Matt & Chrome Plated



SMGC-3

Glass to Glass 90° Material: SS 202 / SS 304 Door Thickness: 8mm-12mm Finish: Matt & Chrome Plated



SMGC-4 L Connector

Material: SS 202 / SS 304 Door Thickness: 8mm-12mm Finish: Matt & Chrome Plated



SMGC-5

Glass to Glass 180° Material: SS 202 / SS 304 Door Thickness: 8mm-12mm Finish: Matt & Chrome Plated





Plastic Profiles







SMPP-01 For: 8/10/12mm glass Size: 2.2mtr



SMPP-02 For: 8/10/12mm glass Size: 2.2mtr



SMPP-03 For : 8/10/12mm glass Size : 2.2mtr



SMPP-04 For: 8/10/12mm glass Size: 2.2mtr



SMPP-05 For : 8/10/12mm glass Size : 2.2mtr



SMPP-06 For: 8/10/12mm glass Size: 2.2mtr



SMPP-M1 For : 8/10/12mm glass Size : 2.2mtr



SMPP-M2 For: 8/10/12mm glass Size: 2.2mtr



SMPP-M3 For : 8/10/12mm glass Size : 2.2mtr









Shower Knight Head Acc.







SMKH-01 Wall to Rod (Dia 19mm)



Rod to Glass (Dia 19mm)



SMKH-03 Rod to Rod (Dia 19mm)



SMKH-04Rod to Rod Connector (Dia 19mm)

Door Knobs



SMDK-01



SMDK-02

Reinforcing Bars











Office Sliding Systems





SMSL-44-A1

Roller (S.S.)

Four fiber reinforced plastic rollers of 30 mm diameter Stainless Steel Grade 304 glass holding point Height adjustable glass holding points (10 mm) Secure grip for the door Self aligning suspension of door Roller configuration for even distribution of load Independently connected rollers to prevent damage to track and rollers Suitable for 10 mm or 12 mm glass



Suitable for door weight 40 kg.

SMSL-44G Floor Guide




SMSL-44-A3 Stopper



SMSL-44-A2 Roller (Brass)

Heavy duty sliding door roller Suitable for up to a door weight of 80 Kg Larger surface area for secure grip of the door Adjustable threaded rod for installation perfection Solid brass for glass holding



G-Glider

Roller

(For Wooden and Aluminium Doors)
Heavy duty sliding door roller
Suitable for up to a door weight of 80 Kg

Larger surface area for secure grip of the door



SMSL-44-A4 Side Plate For Track



SMSL-HN-80 Rectangle Handle



SMSL-HN-50 Rectangle Handle





Lock's without Cutout





SMLK-1 Double Door Lock



SMLK-2 Single Door Lock



SMLK-3 Double Door Lock



SMLK-4 Single Door Lock



SMLK-5 Double Door Lock



SMLK-6 Single Door Lock





SMLK-7 Double Door Lock (Push Button)



SMLK-8 Single Door Lock (Push Button)



SMLK-9 Double Door Lock



SMLK-10 Single Door Lock





Automatic Sliding Sensor Door







Smooth and Silent

It moves silently with use of DC brush-less motor and moves smoothly due to highly precise design.

Power Saving

High efficient circuit is designed in order to save electricity.

DC Brush-less Motor

DC brush -less motor benefit with high rotational speed, low electric consumption & protection from overloading. More advantages are rapid response, potential torque, plus linear variation of voltage.

Multi Function Controller

It's a micro processor controller with LED display. It has multi function that you can set according to you needs. The self-learning microprocessor control ensures reliable operation keeps the motion cycles harmonized and satisfies high safety requirements.

User Friendly

Due to it user friendly module, it's easily adaptable to individual requirement.







Door Sensor

Controller

Safety Beam

Motor









Tail Wheel

Belt

Door Stopper

Track



Door Handles (SAN







SMDH-55 H Handle

Diameter	Centre to Centre Hole	Overall Length
25	212	325
25	240	325
25	455	600
32	302	457
32	480	600
32	700	900
32	900	1200
32	1200	1500



SMDH-77 (S Handle)

Centre to Centre Hole	Overall Length
250	350
302	457
420	600
	250 302



SMDH-11 (D Handle)

Diameter	Centre to Centre Hole	Overall Length
25	302	327
25	420	450
32	568	600



SMDH-55 (Dotted)

Ombii oo (Bottoa)					
Diameter	Centre to Centre Hole	Overall Length			
25	200	325			
32	302	457			
32	480	600			









